

# Versa® UCS2100 Collaboration Switcher Kit



Versa UCS2100 is a collaboration switcher kit designed for modern hybrid, flexible UC (Unified Communication) meeting spaces.

- > Automatically detects HDMI and USB-C sources, such as dedicated in-room PC and BYOM laptop, and offers the flexibility for users to access the same set of in-room AV peripherals, such as cameras and audio devices.
- > Supports up to 4K 60 Hz 4:4:4 resolution, HDCP 2.2, HDR 10 and Dolby Vision.
- > Bi-Directional HDBaseT 3.0, allows the remote peripherals to be placed at a distance of up to 100 meters and provides 48 V PoE.
- > USB-C input supports up to 100 W charging.
- > Ethernet ports provide network passthrough between the transmitter and receiver unit.
- > The transmitter unit provides simultaneous 1 x HDMI output and 1 x HDBaseT output.
- > Supports automatic source detection & switching.
- > Controllable via RS-232, TCP/IP, or front panel buttons.
- > Multiple USB ports on both the transmitter and receiver for connecting a camera, audio device, mouse, and keyboard.



### Broad Interoperability

Versa UCS2100, combined with UNITE series cameras, INTERACT, CONVERGE Pro 2, CONVERGE HUDDLE, and CHAT series audio conferencing devices, offer guaranteed performance and a streamlined user experience.



### Simple BYOM Connectivity

Dual USB hosts (USB-B and USB-C) for In Room PC and Bring-Your-Own-Meeting (BYOM) Laptop connectivity.

### APPLICATIONS

- BYOM Video Conferencing
- BYOM Audio Conferencing
- In-Room Presentation


### WORKSPACES

- Small to mid-sized meeting rooms
- Boardrooms
- Executive Offices
- Classrooms

# Versa® UCS2100 Collaboration Switcher Kit

## Professional Application

Complete your **Versa UCS2100 Collaboration Switcher Kit** setup by adding ClearOne products

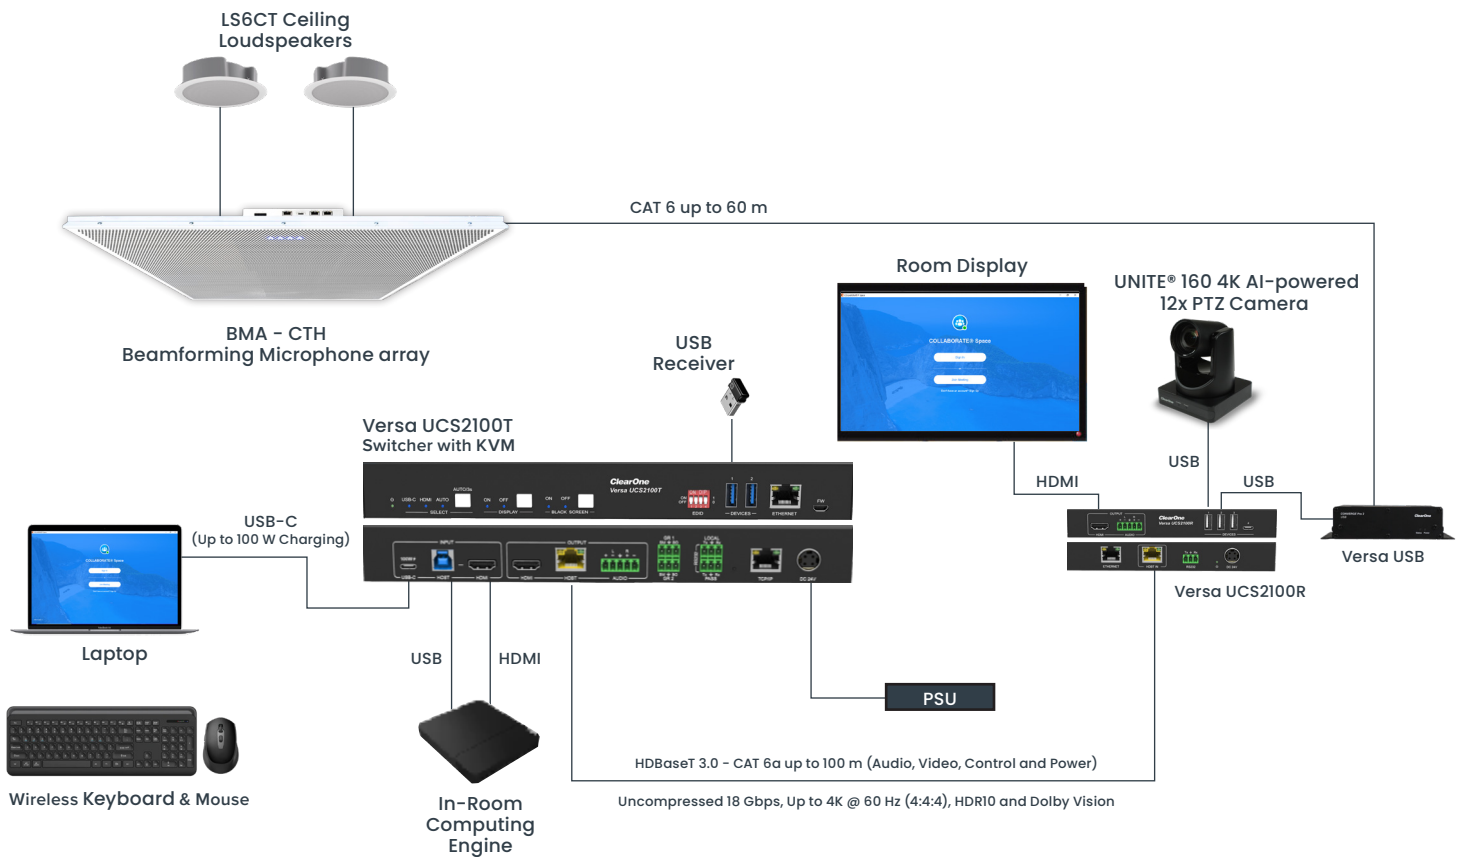

# Versa<sup>®</sup> UCS2100 Collaboration Switcher Kit

<b>PART NUMBER</b> .....	• 910-3001-120
<b>VIDEO: TRANSMITTER VIDEO INPUTS</b> .....	<ul style="list-style-type: none"><li>• 1 x HDMI Type-A female connector plus 1 x USB-B host, 1 x USB-C input</li><li>• HDMI 2.0, max resolution 4K @ 60 Hz 4:4:4, HDR 10 and Dolby Vision, HDCP 2.2</li><li>• USB-C max resolution 4K@ 60 Hz 4:4:4, Up to 100 W power delivery for external charging.</li></ul>
<b>VIDEO OUTPUTS</b> .....	<ul style="list-style-type: none"><li>• 1 x HDMI Type-A female connector and 1 x HDBaseT output RJ-45 connector</li><li>• HDMI: Up to 4K @ 60 Hz 4:4:4 HDR 10, Dolby Vision, HDCP 2.2</li><li>• HDBaseT: Up to 4K @ 60 Hz 4:2:0.</li><li>• HDBaseT 3.0 (18 Gbps) supports up to 100m transmission and bi-directional 48 V Power over CAT(PoC). To reach 100 m distance, Cat 6a (or better) cable must be used.</li></ul>
<b>AUDIO INPUTS</b> .....	<ul style="list-style-type: none"><li>• Audio Inputs: 1 x HDMI Embedded Audio</li><li>• Supported Formats: LPCM 7.1 audio, Dolby Atmos<sup>®</sup>, Dolby<sup>®</sup> TrueHD, Dolby Digital<sup>®</sup> Plus, DTS:X<sup>™</sup>, and DTS-HD<sup>®</sup> Master Audio<sup>™</sup> pass-through</li></ul>
<b>AUDIO OUTPUTS</b> .....	<ul style="list-style-type: none"><li>• 1 x HDMI loop through</li><li>• 1 x 5-pin terminal block balanced stereo audio output de-embedded</li><li>• Frequency Response: 20 Hz – 20 kHz, ± 3 dB</li><li>• Max Out Level: 0.88 Vrms ± 0.5 dB. 2 V = 16 dB headroom above -10 dBV (316 mV) nominal consumer line level signal SPDIF: ±0.05 dBFS</li><li>• THD+N: &lt; 0.05% (-80 dB), 20 Hz – 20 kHz bandwidth, 1 kHz sine at 0 dBFS</li><li>• SNR: &gt; 80 dB, 20 Hz – 20 kHz bandwidth SPDIF: &gt; 90 dB, 20 Hz – 20 kHz bandwidth</li><li>• Crosstalk Isolation: &lt; -80 dB, 10 kHz sine at 0 dBFS level (or max level before clipping)</li><li>• L-R Level Deviation: &lt; 0.3 dB, 1 kHz sine at 0 dBFS level (or max level before clipping)</li><li>• Out Load Capability: 1 kΩ and higher.</li></ul>
<b>USB PERIPHERALS</b> .....	<ul style="list-style-type: none"><li>• 2 x USB 3.0 USB Type-A connector (Data speed up to 5 Gbps)</li><li>• Device Port Control: Auto, On, Off</li></ul>
<b>CONTROL</b> .....	<ul style="list-style-type: none"><li>• Front-panel buttons for Auto/Manual inputs selection, Display ON/OFF, Black Screen ON/OFF.</li><li>• Auto Switch 5 V or TMDS detection</li><li>• RS-232 LOCAL, 3-pin terminal block connector for unit control</li><li>• RS-232 PASS, 3-pin terminal block connector for bi-directional pass-thru transmission with receiver</li><li>• Supports 3rd Party Dry Contact Control</li><li>• GR1 for USB-C; GR2 for HDMI; SM for Switch to current source; BO for black screen to outputs.</li><li>• 4-pin DIP switches for EDID management</li></ul>
<b>ETHERNET</b> .....	<ul style="list-style-type: none"><li>• 1 x RJ-45 for network passthrough transmission via HDBaseT</li><li>• 1 x RJ-45 TCP/IP Control</li></ul>
<b>SERVICE</b> .....	<ul style="list-style-type: none"><li>• 1 x Micro-USB for firmware upgrades</li></ul>
<b>POWER</b> .....	<ul style="list-style-type: none"><li>• 1 x 4-pin DIN connector power adapter 24 VDC 5 A</li></ul>

# Versa® UCS2100 Collaboration Switcher Kit

### VIDEO: RECEIVER

- VIDEO INPUTS** ..... • 1x RJ-45, HDBaseT 3.0, 18 Gbps
- VIDEO OUTPUTS** ..... • 1 x HDMI Type-A female connector HDMI 2.0, max resolution 4K @ 60 Hz 4:4:4, HDR 10 and Dolby Vision, HDCP 2.2.
- AUDIO OUTPUTS** ..... • 1 x 5-pin terminal block balanced audio output; HDMI audio de-embedded
- USB PERIPHERALS** ..... • 3 x Type-A, 1 x Type-C (Data speed USB 2.0, up to 250 Mbps)  
• Individual Device Port Control: Auto,On,Off
- ETHERNET** ..... • 1 x RJ-45 for network passthrough transmission
- RS-232** ..... • Bi-directional passthrough transmission with transmitter
- POWER** ..... • 1 x 4-pin DIN connector power adapter 24 VDC 5 A
- GENERAL** ..... • Operation Temperature: -5 - +55 °C  
• Storage Temperature: -25 - +70 °C  
• Relative Humidity: 10 % - 90 %  
• External Power Supply: Input: AC 100/240 V, 50/60 Hz; Output: 24 VDC 5 A  
• Power Consumption: 120 W (Max)  
• USB-C Power Charging: 100 W (Max)  
• Dimension (Transmitter) (W x H x D): 10.43 x 5.9 x 1.25 " (265 x 150 x 32 mm)  
• Dimension (Receiver) (W x H x D): 6.8 x 3.7 x 0.96 " (173 x 95 x 24.5 mm)  
• Weight (Transmitter): 2.24 lbs (1.02 Kg)  
• Weight (Receiver): 0.90 lbs (0.41 Kg)  
• HDBaseT Cable: Cat 6 cable can be used for distances up to 50 meters. To reach the maximum distance of 100 meters, Cat 6a (or better) cable with 23 AWG, 4-pair solid bare copper, must be used

### SALES AND INQUIRIES

#### Headquarters

5225 Wiley Post Way  
Suite 500  
Salt Lake City, UT 84116

#### US & Canada

Tel: +1.801.975.7200

#### International

Tel: +1.801.975.7200

#### Sales

Tel: +1.801.975.7200  
sales@clearone.com

#### Tech Support

Tel: +1.801.974.3760  
videotechsupport@clearone.com