
VISUAL COLLABORATION

COLLABORATE® Versa™ Pro 160



Add another dimension to meetings with professional audio and video for your web-conferencing application.



- > One Ceiling Microphone Array with 360-degree coverage reducing noise and reverberation.
- > Clutter-free with optional CONVERGE Huddle VESA mount.
- > One UNITE® 160 4K Camera with Smart Face Tracking or Auto Framing. All processing optionally tracks an individual or frames an entire group for perfect framing and focus.
- > Configure Versa Pro CT directly through the USB port, or use network Ethernet jack.
- ➤ Monitor, control, and audit Versa Pro CT with CONVERGENCETM unified AV network management software.



Professional, Crystal-clear audio
Includes ClearOne's CONVERGE® Huddle audio
DSP mixer and Ceiling Mic Array for crystal-clear
voice clarity and an unrivaled audio experience.



Enhances Any Cloud-based App Add pro-quality audio and HD video to your app, such as Microsoft Teams, Zoom, Webex, and GoToMeeting.

APPLICATIONS

- BYOD Video Conferencing
- BYOD Audio Conferencing
- In-Room Presentation

WORKSPACES


- Mid-sized Meeting Rooms
- Executive Offices



BYOD COLLABORATION

COLLABORATE® Versa™ Pro 160

COLLABORATE Versa Pro 160 using Room PC and display, with optional ClearOne Ceiling Loudspeakers

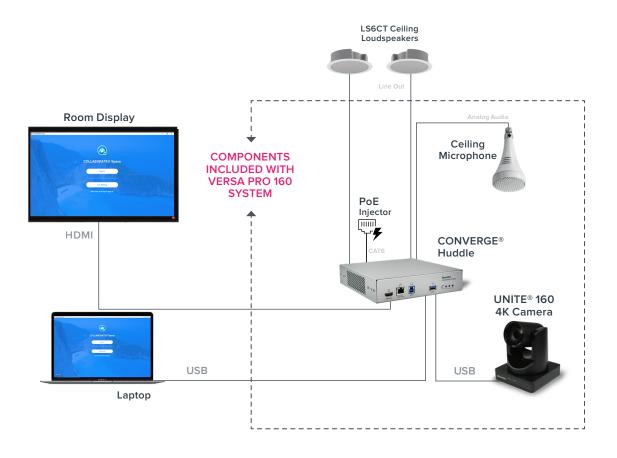



BYOD COLLABORATION

VISUAL **COLLABORATION**

COLLABORATE® Versa™ Pro 160

INCLUDES • CONVERGE® Huddle CTH • UNITE® 160 4K Camera • Ceiling Microphone Array (White) • PoE Injector Kit **CONVERGE HUDDLE** INPUTS • 3 channel balanced audio mic/line inputs with AEC • 1 channel balanced audio line input without AEC • 3.81 mm orange-color Phoenix/Euroblock type male header, push-on mini-terminal block type male header, push-on mini-terminal block • 1 USB 3.0 Type-B • 1 USB 3.0 Type-A • RJ-45, 10/100/1000 Mbps, passthrough to USB-B 3.0 + Ultra-high resolution support (up to 2560 x 1600) UNITE® 160 4K CAMERA • Al-controlled Autoframing and Smart Face Tracking 4K UHD • 12x Optical Zoom • Horizontal Angle of View: 71° - 8.2° Vertical Angle of View: 42.7 ° – 4.5 ° • Horizontal Rotation Range: ±170 ° • Vertical Rotation Range: -30 ° - +90 ° • Pan Speed Range: 2.7 ° - 35.7 °/s • Tilt Speed Range: $2.7 \,^{\circ} - 31.5 \,^{\circ}/s$ · Control: IR Remote, RS-232, or UVC protocol CONTROL • Remote control, USB (UVC), RS-232 **CEILING MICROPHONE ARRAY** ACOUSTIC CHARACTERISTICS • Polar Pattern: Cardioid • Dynamic Range: 80 dB, 1 kHz @ max SPL • Signal/Noise Ratio: 60 dBA, 1 kHz @ 1 Pa • Frequency Response: 100 Hz - 12 kHz • Sensitivity: 114 mV/Pa ELECTRICAL CHARACTERISTICS • Element: Fixed-charge back plate permanently polarized condenser Phantom Power Requirement: 12 - 52 VDC, 2 mA typical • Impedance: 200 Ω PART NUMBERS • 930-3200-P160 COLLABORATE® VERSA Pro 160 **INCLUDES** • 910-3200-706 CONVERGE® Huddle CTH • 910-210-012 UNITE® 160 4K Camera • 910-001-013-W Ceiling Microphone Array (White) • 910-3200-202 PoE Injector Kit

SALES AND INQUIRIES

Headquarters US & Canada International Sales **Tech Support** 5225 Wiley Post Way

Suite 500 Salt Lake City, UT 84116

Tel: +1.801.975.7200 Tel: +1.801.975.7200

Tel: +1.801.975.7200 sales@clearone.com Tel: +1.801.974.3760 audiotechsupport@clearone.com