VISUAL COLLABORATION

COLLABORATE® Versa™ Pro 60



Improve the BYOD experience in huddle spaces and small conference rooms by adding professional quality audio and video.



- > One Ceiling Microphone Array with 360-degree coverage reducing noise and reverberation.
- > Clutter-free with optional CONVERGE Huddle VESA mount.
- > One UNITE® 60 4K Camera with Smart Face Tracking or Voice Tracking. All processing optionally tracks an individual or frames an entire group for perfect framing and focus.
- > Configure Versa Pro CT directly through the USB port, or use network Ethernet jack.
- > Monitor, control, and audit Versa Pro CT with CONVERGENCE™ unified AV network management software.



Professional, Crystal-clear audio
Includes ClearOne's CONVERGE® Huddle audio
DSP mixer and Ceiling Mic Array for crystal-clear
voice clarity and an unrivaled audio experience.



Smart Face or Voice Tracking

Al processing optionally tracks an individual or frames an entire group for perfect framing and focus.

APPLICATIONS

- BYOD Video Conferencing
- BYOD Audio Conferencing
- In-Room Presentation

WORKSPACES


- Mid-sized Meeting Rooms
- Executive Offices



BYOD COLLABORATION

COLLABORATE® Versa™ Pro 60

COLLABORATE Versa Pro 60 using Room PC and display, with optional ClearOne Ceiling Loudspeakers

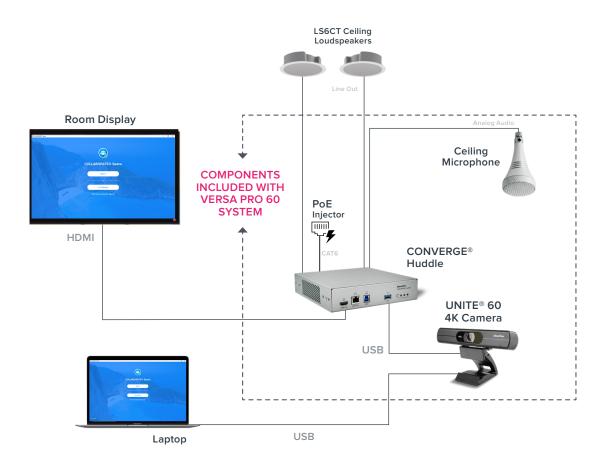



BYOD COLLABORATION

VISUAL COLLABORATION

COLLABORATE® Versa™ Pro 60

INCLUDES	CONVERGE® Huddle UNITE® 60 4K Camera Ceiling Microphone Array (White) PoE Injector Kit
CONVERGE HUDDLE INPUTS	 3 channel balanced audio mic/line inputs with AEC 1 channel balanced audio line input without AEC 3.81 mm orange-color Phoenix/Euroblock type male header, push-on mini-terminal block
LINE OUTPUTS	 2 channel balanced audio line outputs, 3.81 mm black-color Phoenix/Euroblock type male header, push-on mini-terminal block 1 USB 3.0 Type-B 1 USB 3.0 Type-A RJ-45, 10/100/1000 Mbps, passthrough to USB-B 3.0
HDMI RESOLUTIONS	• 1600 x 1200p @ 60 Hz, 4:3 ratio • 1920 x 1200p @ 60 Hz, 16:10 ratio • 2560 x 1440p @ 60 Hz, 16:9 ratio
UNITE® 60 4K CAMERA	 4K 30fps, 8.29 M Pixel resolution Smart Face Tracking, Voice Tracking 120° Wide-angle Field View Control of camera functions via IR remote control or UVC protocol 3x Digital Zoom, f/1.8 to 2.8 Aperture
CONTROL	• Remote control, USB (UVC), RS-232
CEILING MICROPHONE ARRAY ACOUSTIC CHARACTERISTICS	 Polar Pattern: Cardioid Dynamic Range: 80 dB, 1 kHz @ max SPL Signal/Noise Ratio: 60 dBA, 1 kHz @ 1 Pa Frequency Response: 100 Hz - 12 kHz Sensitivity: 114 mV/Pa
ELECTRICAL CHARACTERISTICS	• Element: Fixed-charge back plate permanently polarized condenser • Phantom Power Requirement: 12-52 VDC, 2 mA typical • Impedance: $200~\Omega$
PART NUMBERSINCLUDES	 930-3200-P60 COLLABORATE® VERSA Pro 60 910-3200-701 CONVERGE® Huddle 910-210-009 UNITE® 60 4K Camera 910-001-013-W Ceiling Microphone Array (White) 910-3200-202 PoE Injector Kit

SALES AND INQUIRIES

Headquarters US & Canada International Sales Tech Support

5225 Wiley Post Way Suite 500 Salt Lake City, UT 84116 Tel: +1.801.975.7200

Tel: +1.801.975.7200

Tel: +1.801.975.7200 sales@clearone.com Tel: +1.801.974.3760 audiotechsupport@clearone.com