



The industry's first fully expandable, tabletop conference phone, MAX[®] EX provides unrivaled audio clarity with ClearOne's HDConference[®] audio-processing technology.

HDConference Audio

- + Distributed Echo Cancellation[®] and noise cancellation along with full-duplex performance and automatic level controls guarantee your conference calls to be natural with unmatched audio clarity free of any distractions

Acoustic Intelligence

- + First-mic priority intelligently activates only the microphone closest to the person speaking, preventing the amplification of ambient noise and room reflections. Adaptive modeling continuously samples room acoustics for any changes

360-degree Coverage

- + Three built-in microphones array with 360-degree audio pickup within 12 feet per conference phone. Large loudspeaker for rich, clear conferencing and audio playback



Expandability

MAX EX

- + Provides a standalone solution for small to medium conference rooms

- + Link up to four complete phones, not just microphones, for expanded coverage with MAX EX Expansion Kits

MAXAttach

- + Comes with two phone units and a single base unit for medium conference rooms; also available in 3-phone and 4-phone kits

- + Divide MAXAttach into multiple phone systems for use in separate rooms with MAX EX Expansion Base

MAX EX Expansion Kit

- + Includes phone and connecting cable to expand MAX EX room coverage (base not included)

MAX EX Expansion Base

- + Used to divide MAXAttach into multiple phone systems for use in separate rooms to provide unrivaled flexibility and affordability

Ease of Use & Control

- + Simply plug base unit into power and phone line, then dial and talk
- + Features user-friendly telephone style controls
- + Speed dial stores 10 frequently dialed numbers
- + Recording output on base unit connects to a recording device to capture both sides of the conversation
- + Linked MAX phones can be operated using the dial pad of any phone – dialing, mute, volume controls, etc.




VENUES

Executive Office

Small Office/Home Office

Training Rooms

Large Conference Rooms

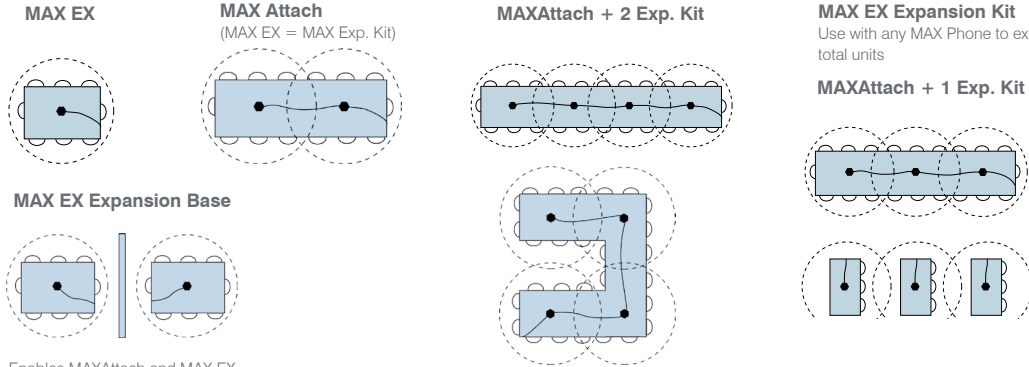

Enables MAXAttach and MAX EX Expansion Kits to be used in separate rooms. Includes power supply and 25' cable.

PRODUCT SPECIFICATIONS

Echo Cancellation

Tail Time: 60 ms x 3

Noise Cancellation

Dynamic Noise Cancellation

Telephone Connection

Analog PBX or PSTN line

RJ-11C, -12 dBm nominal

Keypad

Alphanumeric Standard Keypad

Loudspeaker

Volume: 90 dBspl A weighted @ 1ft

Bandwidth: 200 Hz - 3.3 kHz

Record Output

Connector: 2.5 mm mono audio jack

Impedance: <1000 ohms

Bandwidth: 200 Hz - 3.3 kHz

Dynamic Range: 60 dB

THD <.01%

Certifications

FCC part 15/ICES-003 Class A

FCC part 15 Subpart C/RSS-210

FCC part 68/IC CS-03

CE

UL Certified

Power

Base Unit: Auto-adjusting power module;

100-240 VAC; 50/60Hz

Environmental

Operating temperature: 32–118° F (0–48° C)

Storage temperature: 41–158° F (5–70° C)

Operating humidity: 15 to 80%

Storage humidity: 10 to 90%

Dimensions (W x D x H)

Phone unit: 10.5" x 10.5" x 3"
(26.7 cm x 26.7 cm x 7.6 cm)

Base unit: 4.25" x 5.5" x 2.5"
(10.8 cm x 14 cm x 6.4 cm)

Weight

Phone unit: 2.7 lb (1.2 kg)

Base unit: .6 lb (0.27 kg)

Shipping: MAX Wireless 10 lb (4.5 kg)

MAX Wireless Includes

Wireless phone unit (1)

Base unit (1)

Battery pack (1)

Power supply/charger (1)

Power supply retainer (1)

Telephone cable

Documentation CD

Quick start guide

Model Numbers

MAX EX

910-158-500 (North America)
910-158-501 (Europe / UK - ROHS)
910-158-017 (Hong Kong / Singapore)
910-158-014 (Japan)
910-158-018 (Australia / New Zealand)
910-158-019 (South Africa)
910-158-200 (South Korea)
910-158-201 (China)

MAXAttach

910-158-500-00 (North America)
910-158-501-00 (Europe / UK - ROHS)
For MAXAttach plus 1, change -00 to -01 in part number; for MAXAttach plus 2, change -00 to -02 in part number.
910-158-058 (Hong Kong / Singapore)
910-158-056 (Japan)
910-158-059 (Australia / New Zealand)
910-158-060 (South Africa)
910-158-061 (South Korea)
910-158-062 (China)
For MAXAttach plus 1, add -01 to part number; for MAXAttach plus 2, add -02 to part number.

MAX EX Expansion Base

910-158-555 (All Countries)

Includes:

MAX phone unit (1)
12' Cat. 5 cable (1)
Documentation CD
Quick Start Guide

MAX EX Expansion Base:

910158-51 (Europe / UK - ROHS)
910-158-550 (All other countries)

Includes:

MAX base unit (1)
25' Cat. 5 cable (1)
Telephone Cable
Documentation CD
Quick Start Guide



SALES AND INQUIRIES

Headquarters

5225 Wiley Post Way
Suite 500
Salt Lake City, UT 84116

US & Canada

Tel: 801.975.7200
TollFree: 800.945.7730
Fax: 801.303.5711

International

Tel: +1.801.975.7200
global@clearone.com

Sales

Tel: 801.975.7200
sales@clearone.com

TechSales

Tel: 801.974.3760
techsales@clearone.com

TechSupport

Tel: 801.974.3760
tech.support@clearone.com