

## GRQ3122-S

### Specifications



Hands-on or hands-off digital processors from Sabine. The Graphi-Q<sup>2</sup> GRQ3122-S is a groundbreaking full-featured speaker management device, with GRQ<sup>2</sup> remote software and a blank front panel for the ultimate in system security. Sabine's multi-function processor once again sets the standard for all-in-one speaker management solutions. The GRQ<sup>2</sup> combines eight indispensable audio products into one all-digital package. With the touch of a fader you can shape your frequency response using the GRQ<sup>2</sup>'s 31-band digital graphic EQ. Use the parametric EQ to control your filter width, depth and frequency. Time align your speakers with the digital delay. Manage your system gain with the GRQ<sup>2</sup> digital compressor/limiter. Finally, add 3 to 9 dB extra gain and automatic feedback control with Sabine's patented FBX technology. In addition, Sabine's GRQ2 Remote Control Software gives you instant access to all front panel controls and an additional layer of functions. You can view and edit frequency response curves, view edits before executing them, and take advantage of unlimited GRQ<sup>2</sup> file storage.

#### PERFORMANCE<sup>2</sup>

Frequency response: 20 Hz to 20 KHz,  $\pm 0.2$  dB @ +18 dBV  
THD: <0.01% at 1.0 KHz at +18 dBV with 30KHz bandwidth  
SNR<sup>\*\*\*</sup>: >105 dB  
Dynamic Range: >110 dB  
Headroom: +14 dB @ 4 dBV nominal input (balanced)

#### GRAPHIC EQUALIZER

31 digital filters on 1/3-octave ISO center frequencies, width adjustable from 0.5 to 1.0 octave in .01 octave increments;  $\pm 12$  or 6 dB boost and cut.  
 $\pm 6$  or 12 dB boost and cut range.  
Independent display and control of A & B channels

#### FBX/PARAMETRIC FILTERS

Twelve independent digital filters per channel, controlled automatically or parametrically from 20 Hz to 20 KHz, each switchable (GRQ2 Remote) between FBX fixed filters, FBX dynamic filters, and parametric filters<sup>1</sup>  
Filter depth: user-controllable in 1 dB steps from +12 dB to -84 dB (parametric mode); 3 dB steps from 0 dB to -80 dB (FBX mode), max. FBX depth adjustable from -6 to -80 dB  
Filter width: user-controllable from 9.99 to .01 octave (parametric), 1.0 to .01 octave (FBX\*)  
Low Cut Filter, user-controllable between 20 Hz and 1 KHz; 12 dB/octave roll-off  
High Cut Filter, user-controllable between 3 KHz and 20 KHz; 12 dB/octave roll-off  
Resolution: 1 Hz from 20 Hz to 20 KHz, FBX & parametric mode  
Time required to find and eliminate feedback: typically 0.3 seconds @ 1 KHz  
Total number of combined filters active per channel: user-selectable, 0-12; plus low and high cut filters  
Filters controllable via table or graphic interface.

#### INPUT/OUTPUT\*\*

Input impedance: Balanced > 10K Ohms, PIN 2 high  
Output impedance: Balanced 50 Ohms nominal, PIN 2 high  
Input/Output maximum signal levels: Balanced +18 dBV peak  
Maximum output load: 600 Ohms balanced  
Bypass: true power-off bypass  
I/O connectors: XLR-3, 1/4" TRS  
GRQ3122-S: Dual channel, one input, one output per channel  
Functions on each output selectable via GRQ2 Remote

#### UPGRADES

Operating system firmware stored in FLASH RAM.  
All future upgrades for firmware and software downloadable from Sabine website using the Sabine Upgrade Wizard.  
[www.sabine.com](http://www.sabine.com)

#### DIGITAL PROCESSING

24 bit A/D and D/A  
32-bit DSP

#### CONTROLS

GRQ3122-S: GRQ Remote (RS-232), Remote switching

#### POWER

50/60 Hz available in 100V, 120V, 230V; 20W.

#### CROSSOVER

1x2; available in all Graphi-Q2 units  
Bessel, Butterworth, Linkwitz-Reilly filters  
Slopes: 12, 24, 36, and 48 dB/octave

#### DIGITAL COMPRESSOR/LIMITER

Threshold: +32 dBV to -30 dBV peak in 0.5 dB steps  
Ratio: 1:1 through infinity  
Knee: variable soft/hard  
Attack: 1 to 99 msec in 1 msec steps<sup>1</sup>  
Release: .05 to 5 sec in .05 sec steps<sup>1</sup>  
Peak limit threshold: +32 dBV to -30 dBV peak in 0.5 dB steps<sup>1</sup>  
Mode: Stereo or dual mono

#### DIGITAL DELAY

1.38 mSec to 999.96 mSec in 20 microsecond steps.  
Programmable in milliseconds, feet or meters.

#### PASSWORD CONFIGURATION

4 levels.<sup>1</sup>

#### SAVE & RECALL CONFIGURATIONS<sup>1</sup>

20 user defined  
1 factory default  
1 most recent configuration (power down save)  
1 front panel

#### DIMENSIONS


1-U rack mount: 19 x 1.75 x 9.5 in. (48.3 x 4.5 x 22.9 cm);  
Weight: 8 lb. (3.6 Kg).

#### OPERATING TEMPERATURE

Safe Operating Temperature: 0 - 50 degrees centigrade ambient temperature (32-129F)

## GRQ3122-S

### Specifications (continued)

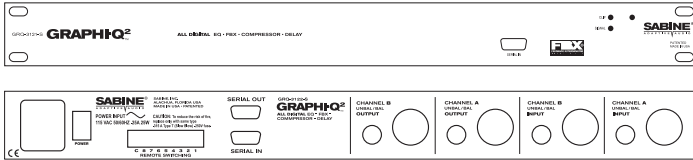

### Architect's and Engineer's Specifications:

The Sabine GRQ3122-S graphic EQ/parametric EQ/automatic feedback controller/compressor/limiter/delay/crossover shall be a dual channel digital signal processor, programmable only with provided Windows software, Graphi-Q<sup>2</sup> Remote, including linkable functions, remote programming and auto-FBX setup. The unit shall automatically sense feedback and determine its pitch, then assign a digital notch filter to the resonating frequency to automatically eliminate the feedback. It shall effectively distinguish between music and feedback and shall be operational during the program. The product shall use three types of user-selectable filters: parametric, fixed FBX or dynamic FBX. The user controls the parametric filters; the fixed FBX filters, controlled automatically, remain set on the initial feedback frequencies, and the dynamic FBX filters shall be automatically reassigned new frequencies as feedback occurs during the program. The GRQ3122-S shall also function as a 12-band parametric equalizer, 31-band graphic equalizer, full-featured compressor/limiter, 1x2 crossover, and digital delay for speaker alignment. The unit shall include a blank front panel for system security. The unit shall also be provided with the following back panel controls: XLR-3 input/output connectors; 1/4" TRS connector, 8-pin Euroblock connector for switch remote control connection; an internal power supply and power cord; an RS232 remote control connector; an RS232 network connector; and a ground/lift button. The unit shall be the Sabine GRAPHI-Q<sup>2</sup> GRQ3122-S Speaker Management System.

\* Below approximately 200 Hz the feedback filters become slightly wider to increase the feedback and rumble capture speed at these low frequencies.

\*\* Inputs may be balanced or unbalanced. For maximum output capabilities, outputs must be balanced (XLR or TRS). If either side of an output is grounded, the peak and output dynamic range will be reduced by 6 dB.

\*\*\* Signal-to-noise ratio is the ratio of the maximum undistorted signal by specification (26 dBV RMS sinewave) to the noise floor.

<sup>1</sup> Available using GRQ Remote Software only.

<sup>2</sup> Tests performed using an Audio Precision System One model 322 or equal.

(SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE)

\*Below approximately 200 Hz the feedback filters become slightly wider to increase the feedback and rumble capture speed at these low frequencies.

\*\*\*Company names, product names, and trademarks listed here are the property of their respective owners and are used only to identify evaluated microphones used to develop digital processing; they in no way imply association, endorsement, or approval by any named manufacturer.