



ClearOne's Touch Panel Controller, a highly intuitive 10-inch, touch-screen device designed for CONVERGE Pro 2, allows users to control their audio conference, including managing contacts and placing and controlling calls.

Flexible connectivity options and a choice of tabletop, wall, or VESA mounting options offer an integrator-friendly solution that fits perfectly in any space.

### Call Management

- + On-screen dialpad
- + Make & receive PSTN / VoIP calls
- + Multi-party conference calls
- + Call control – hold, transfer, forward, history

### Contact Management

- + Phone book
- + Favorite contacts
- + Search contacts
- + Import/Export contacts

### Control

- + Microphone Mute control
- + Speaker Volume control
- + Programmable custom control

### Touch Panel

- + 10.1" (25.7 cm) screen size
- + Capacitive touch screen
- + 1280 x 800 resolution

### Flexible Mounting

- + Tabletop mount
- + Wall mount
- + 3rd-party mount with VESA Standard

### Connectivity & Power

- + RS232, Ethernet, Wi-Fi
- + Direct connection to CP2 and its expanders
- + Power: AC, PoE, Power over P-Link



#### VENUES

Boardrooms

Conference Rooms

Huddle Rooms

Training Rooms

Lecture Halls

Courtrooms


Auditoriums

Telemedicine Facilities

Touch Panel Controller Top panel



Touch Panel Controller Bottom panel

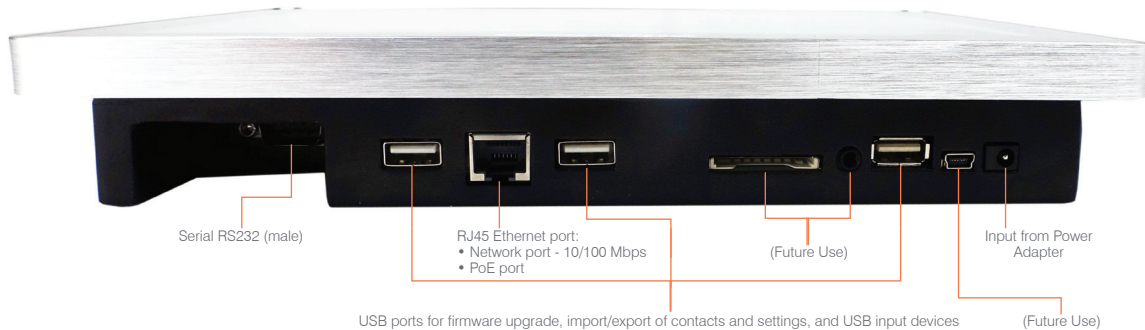

## PRODUCT SPECIFICATIONS

### SCREEN SIZE

10.1" (25.7 cm)

### MAXIMUM HD RESOLUTION

1280 X 800

### VIEWING ANGLE

85 / 85 / 85 / 85

### COLOR BRIGHTNESS

16.7 M

### CONTRAST RATIO

500:1

### BRIGHTNESS

350 cd/m2

### ASPECT RATIO

16:10

### RESPONSE TIME

5 ms

### NETWORK PORT

RJ45 Ethernet port, 10/100 Mbps

### POE PORT

RJ45 Ethernet port (same as Network Port)

### WI-FI

Built-in Wi-Fi 802.11b/g/n, antenna & dust-cap included

### SERIAL PORT

RS232 (male)

### USB PORT

For firmware upgrade

### CASE

Metal case (Black)

### INPUT POWER

6 W

### POWER INPUT

Power Adapter or PoE

### MOUNTING OPTIONS

VESA standard screw holes

### DIMENSION

10.3 x 6.9 x 1.3 in (261 x 174 x 32 mm)

### OPERATING TEMPERATURE

32 to 104 degree Fahrenheit (0 to 40 degree Celsius)

### WEIGHT

2.4 lbs (1.1 kg)

### PART NUMBERS

Part Number	Product
910-3200-501	Touch Panel Controller for CP2
910-3200-502	Tabletop Stand Kit
910-3200-503	Wall Mount Kit
910-3200-504-50	Serial Cable – 50 Feet (15.2 m)
910-3200-504-100	Serial Cable – 100 Feet (30.5 m)
910-3200-505	Serial to Phoenix Euroblock Adapter
910-3200-202	PoE power supply kit for 3 devices
910-001-004	PoE power supply for 1 device
910-3200-204-50	50 ft (15.2 m) RJ45 CAT6 Cable
910-3200-204-100	100 ft (30.5 m) RJ45 CAT6 Cable
910-3200-204-150	150 ft (45.7 m) RJ45 CAT6 Cable
910-3200-204-200	200 ft (61 m) RJ45 CAT6 Cable

## SALES AND INQUIRIES

### Headquarters

5225 Wiley Post Way,  
Suite 500  
Salt Lake City, UT 84116

### US & Canada

Tel: 801.975.7200  
TollFree: 800.945.7730  
Fax: 801.303.5711

### International

Tel: +1.801.975.7200  
global@clearone.com

### Sales

Tel: 801.975.7200  
sales@clearone.com

### TechSupport

Tel: 801.974.3760  
tech.support@clearone.com