

# CONVERGE® Pro 2 128SR




CONVERGE Pro 2 is the industry's most advanced professional audio DSP platform for sound reinforcement applications. It outperforms in any size room, audio environment, and application.

- > Built-in Native Camera Tracking for ClearOne Unite cameras and many 3rd party cameras using RS-232 and Ethernet VISCA over IP
- > 12 mic/line inputs
- > Reduced footprint and power consumption.
- > DARE™ feedback elimination.
- > Standalone and daisy-chained system.
- > Stack up units up to 144 Mic/Line inputs.
- > Expansion bus "C-Link" with 150 channels.
- > Configure and manage entire system with CONSOLE® software, Auto-discovery of devices, MatrixView™ for entire system, FlowView™ for visualized audio signal paths and System monitoring and troubleshooting.
- > Flexible control options include 3rd party control modules for integrated systems.
- > Acoustic Intelligence for better audio.
- > Advanced microphone gating.
- > "P-Link" bus to connect peripheral devices.



### Everything you need

The 128SR model mixer has 12 inputs, 8 outputs, USB audio; GPIO, RS-232, IP control interfaces; and P-Link and C-Link expansion buses.

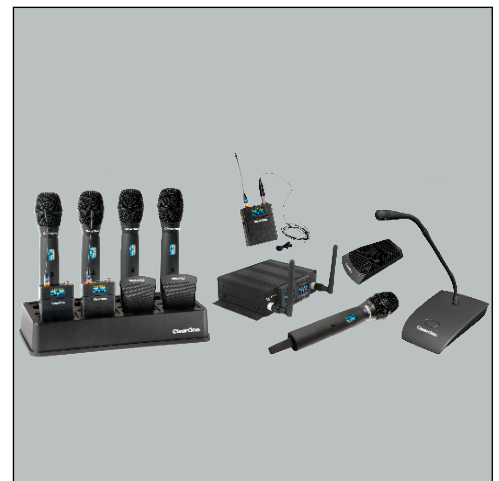

### Easy Integration

Daisy-chain the CONVERGE Pro 2 with DIALOG® 20 USB 2-Channel Wireless Microphone System, and other peripheral devices through P-Link.

### APPLICATIONS

- Background Music
- Sound Reinforcement
- Live Sound

### WORKSPACES

- Corporate Offices
- Training Rooms
- Entertainment Venues
- Lecture Halls
- Courtrooms
- Telemedicine Theaters
- Auditoriums

It's All About the Architecture!®

# CONVERGE<sup>®</sup> Pro 2 128SR

- PART NUMBER** ..... • 910-3200-101
- CAMERA TRACKING** ..... • Supported Cameras: Unite 150, Unite 200, Unite 160, Unite 260 (One Camera per DSP)  
• Communication Protocol: VISCA  
• Communication options: Serial (RS-232) or Ethernet (VISCA over IP)
- MIC/LINE INPUTS & OUTPUTS** ..... • Inputs: Balanced audio inputs, 3.81 mm Black color Phoenix/Euroblock type male header, Push-on miniterminal block  
• Outputs: Balanced audio outputs, 3.81 mm Black color Phoenix/Euroblock type male header, Push-on miniterminal block  
• Frequency Response: 20 Hz – 22 kHz @ +4 dBu, +/- 0.5 dBu  
• EIN (Equivalent Input Noise): 20 kHz BW, max gain,  $R_s = 150 \Omega$ , -126 dBu  
• THD + N (Total Harmonic Distortion + Noise):  
  - 20 Hz – 22 kHz @ +4 dBu, line level, 0.006 %  
  - 20 Hz – 22 kHz @ -56 dBu, mic level, < 0.04 %  
• Dynamic Range: 20 Hz – 20 kHz @ 0 dB, > 105 dB  
• Crosstalk (Mic/Line): Channel to Channel, stimulus at 20 dBu to receptor at -56 dBu, 1 kHz, < -98 dB  
• Input Impedance: Balanced (line to ground), 2,2 k $\Omega$ , 1 %  
• Nominal Input Level: Adjustable -56 dB to 0 dB, 7 dB step coarse gain  
• Maximum Input Level: -65 dBu to 20 dBu  
• Phantom Power: 48 V, Impedance 6.81 k $\Omega$   
• Output Impedance: Balanced (line to ground), 95  $\Omega$ , 1 %  
• Output Level: 0 dBu (Nominal), 20 dBu (Max), -40 dBu (Selectable)
- ETHERNET** ..... • Port Type: RJ-45, 10/100 Mbps Ethernet Network, Auto Negotiation  
• IP address: IPv4 (IPv6 upgradeable through future s/w, f/w upgrade)
- C-LINK EXPANSION BUS** ..... • Ports Type: RJ-45 (Cat 5e or Cat 6)  
• C-Link In & Out: Proprietary Expansion Bus  
• Audio: 150 Expansion channels  
• Cable: Solid core, factory terminated Cat 5e or 6 cable  
• Distance: Up to 80' (24 M)
- P-LINK PERIPHERAL BUS** ..... • Ports Type: RJ-45 (Cat 5e or Cat 6)  
• P-Link In & Out: Proprietary Peripheral Bus  
• PoE In:  
  - P-Link In Port  
  - PoE 802.3 af Mode B, Midspan  
  - Power on "spare pairs" 4, 5 and 7, 8  
  - Input voltage range: 48 V to 56 V  
• Audio: Up to 3 DIALOG 20 USB Wireless Receiver units + Up to 3 USB Expander units + Up to 3 GPIO Expander units  
• Cable: Solid core, factory terminated Cat 5e or 6 cable  
• Distance: Up to 200' (60 M)
- RS-232** ..... • Port Type: DB9 Female  
• Settings: 9600/19200/38400/57600/115200 Baud; Serial Echo; Flow Control  
• Support: Serial commands

# CONVERGE<sup>®</sup> Pro 2 128SR

- GPIO** .....
- Port Type: 5.08 mm Green color Phoenix/Euroblock type male header
  - Support: Control, Status, Variable Voltage Control
  - Power Pin: 5 VDC @ 350 mA Power Source
  - Pin 1 to 4:
    - Open Collector Outputs: 40 VDC @ 250 mA
    - Active Outputs (Source/Sink): 5 VDC @25 mA
    - Logic Inputs: 40.2 k $\Omega$  pull up
    - Variable Voltage Control Inputs: 5 VDC max
  - Ground Pin: GND
- USB CONTROL** .....
- Port Type: USB-B connector
  - Location: Front Panel
  - Compatible: USB 2.0, USB 3.0
- LEDs** .....
- Location: Front Panel
  - Status LED:
    - Off: Unit still initializing
    - Blue - Fast Blinking: Stack Syncing in progress
    - Blue - Slow Blinking: Unit not configured
    - Blue - Solid: Configured unit
    - Red - Fast Blinking: Stack Sync error
  - Locate LED: Blue - Blinking: Unit "Locate" command received
  - Power LED: Blue - Solid: Unit is powered on
- TOUCH SENSOR** .....
- Sensor Type: Capacitive Touch Button
  - Location: Front Panel
- POWER & THERMAL** .....
- Port Type: AC Inlet
  - Mains Voltage: 100-240 VAC, 50/60 Hz
  - Power Consumption: 50 Watts Typical
  - Thermal: 170 BTU/Hr Typical
  - Operating Temperature: 14 °F (-10 °C) to 104 °F (40 °C) Ambient Temperature
- DIMENSION & WEIGHT** .....
- RU size: 1 RU
  - Width x Depth x Height:
    - Without rack-ears: 17 x 10.7 x 1.7 " (431 x 273 x 44 mm)
    - With rack-ears: 19 x 10.7 x 1.7 " (483 x 273 x 44 mm)
  - Unit Weight: 9.3 lbs (4.2 Kg) (Approximately)
  - Shipping Weight: 13.8 lbs (6.3 Kg) (Approximately)

# CONVERGE® Pro 2 128SR

- PACKAGE** .....
- Power Cord: 6' (1.8 M), Grounded, Qty 1
  - Input Connectors: Terminal Block Connector, 4 Position (Orange), Qty 12
  - GPIO Connector: Terminal Block Connector, 6 Position (Green), Qty 1
  - C-Link Cable: RJ-45 To RJ-45 Cable, 18" (45.7 cm), Qty 1
  - USB Cable: USB Type A to Type B, 6' (1.8 M), Qty 1
  - Rack Ears: Pre-installed, Qty 2
  - Screw/Washer Kit: Rack Decor, Qty 4

## SALES AND INQUIRIES

---

### Headquarters

5225 Wiley Post Way  
Suite 500  
Salt Lake City, UT 84116

### US & Canada

Tel: +1.801.975.7200

### International

Tel: +1.801.975.7200

### Sales

Tel: +1.801.975.7200  
sales@clearone.com

### Tech Support

Tel: +1.801.974.3760  
audiotechsupport@clearone.com