

DIALOG® AERO




DIALOG® AERO is a wideband UHF 2-channel encrypted digital wireless microphone solution with over 100 MHz of RF tuning range.

- > With less than 4 ms of end-to-end audio latency, this system is ideal for conferencing and sound reinforcement applications.
- > Includes a modular expandable 2 bay smart dock. Link multiple 2 bay docks together to make up to an 8 bay dock to simplify installation and minimize cabling.
- > All system components utilize USB C connectivity for powering and charging.
- > Microphones can be powered with the included rechargeable Li-Ion AA batteries. Microphones can also be powered using NiMH AA rechargeable batteries, common AA battery types, or USB C.
- > Microphones and Dock can charge Li-Ion and NiMH AA batteries. The Dock also charges spare AA batteries.
- > The receiver connects to any audio device using professional balanced XLR output(s) and an unbalanced 1/4-inch mixed output.
- > The auto-scan feature finds open channels for optimal reception.
- > The receiver has a large LCD display for viewing frequency, RF power level, battery life, received signal strength, and audio level.
- > The receiver's compact half-rack size offers versatile mounting options. It can be installed in an equipment rack using the included rack ears or placed on a desktop, inside a credenza, under a table, or behind a video display.
- > Includes detachable antennas with a 5-foot extension kit for added flexibility.



Professional Quality

Larger systems can be built using optional accessories, which include a four-channel antenna distributor with ceiling mount antennas, antenna combiners, and a joining kit for mounting two receivers in a single rack space.

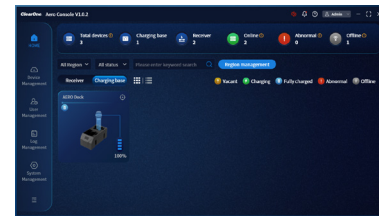

Aero Console Software

Aero Console software provides remote configuration, monitoring and management of the receiver and smart dock via Ethernet.

APPLICATIONS

- Town Hall Meetings
- Company All-hands Meetings
- Company Management Retreats
- School Award Meetings
- Rallies
- House of Worship
- Hybrid Training and/or Presentation Sessions
- Sound Reinforcement and Voice Lift
- Rental Equipment

WORKSPACES

- Class Rooms
- Auditoriums
- Court Rooms
- Gymnasiums
- Huddle Rooms
- Training Rooms
- Multipurpose Rooms

DIALOG® AERO

SYSTEM Specifications

Frequency Range	• 500 MHz - 608 MHz
Modulation	• QPSK
Frequency Response	• 20 Hz to 20 kHz (± 3 dB)
Sampling Rate	• 48 KHz or 24 KHz
SNR	• ≥ 96 dB (A)
THD+N	• < 0.1 %
Dynamic Range	• 120 dB
Working Distance	• 80 m
Audio Latency	• < 4 ms
Encryption	• 32 Bit

RECEIVER Specifications

Display	• Color LCD
Antenna Interface	• BNC 50 Ω
Receiving Sensitivity	• 95 dBm
Maximum Output	• Balanced 500 mV, Unbalanced 1000 mV
Power Supply	• 5 V / 2 A
Working Current	• 775 mA
Dimensions (L×W×H)	• 214.4 × 211.25 × 47 mm
Weight	• 1.2 kg
Antenna Bias	• 9 V
Ethernet	• RJ-45 100 Mbps
Operating Temperature	• -10° C to 45° C

CHARGER DOCK Specifications

Power Supply	• 5 V / 3 A
Charging Current	• Transmitter: 600 mA Lithium battery: 500 mA NiMH battery: 400 mA
Charging Time	• Lithium battery: 1.5 hrs NiMH : 5 hrs
Size	• 166 x 81 x 71 mm
Weight	• 0.5 kg

BELTPACK TRANSMITTER Specifications

Display	• OLED Display
Output Power	• ≥ 10 dBm
Working Current	• ≤ 200 mA
Dimensions (L×W×H)	• 87.33 × 67.61 × 27.72 mm
Battery	• 2 × 1.2 V(AA), 2 × 1.5 V(AA), 2 × 3.7 V (AA)
Battery Life	• 12 hrs
Weight	• 160 g (including battery)
Microphone Connector	• TA3
Operation Voltage Range	• 2.0 V - 10 V

DIALOG® AERO

HANDHELD TRANSMITTER Specifications

Display	• OLED Display
Output Power	• ≥ 10 dBm
Working Current	• ≤ 200 mA
Dimensions	• Length 248.9 mm \times Diameter 49.6 mm (including microphone capsule)
Battery	• 2 \times 1.2 V (AA), 2 \times 1.5 V (AA), 2 \times 3.7 V (AA)
Battery Life	• 12 hrs
Weight	• 368.2 g (including battery)
Open Circuit Sensitivity	• 50 dB @ 1 KHz
Max SPL	• 135 dB
Equivalent Noise Level	• 15 μ V

HEADSET MIC OMNI Specifications

Sensitivity Range	• -47 ± 2 dB RL= 2.2 K Ω Vs = 2.0 V (1 KHz 0 dB = 1 V/Pa)
Impedance	• Max. 2.2 K Ω 1 KHz (RL= 680 Ω)
Frequency	• 20 - 16000 Hz
Current Consumption	• Max. 0.5 mA
Operating Voltage Range	• 2 V to 10 V
Maximum Sound pressure level	• 115 dB S.P.L
Signal-to-Noise Ratio	• 65 dB @ 1 kHz
Line length	• 1 m
Weight	• 23 g

LAV MIC OMNI Specifications

Sensitivity Range	• -40 ± 2 dB RL = 2.2 K Ω Vs = 2.0 V (1 KHz 0 dB = 1 V/Pa)
Impedance	• Max. 2.2 K Ω 1 KHz (RL = 2.2 K Ω)
Frequency	• 20 - 16000 Hz
Current Consumption	• Max. 0.5 mA
Operating Voltage Range	• 2.0 V - 10 V
Maximum Sound Pressure Level	• 115 dB S.P.L
Signal-to-Noise Ratio	• 65 dB @ 1 kHz
Reduced Sensitivity	• 3.0 V - 1.5 V sensitivity change < 3 dB
Line Length	• 1 m
Weight	• 20.6 g

RACK MOUNT JOINING KIT Specifications

Ear Weight	• 29 g
Ear Size	• 26.5 mm x 43 mm
Weight of Splicing Plate	• 96 g
Splicing Board Size	• 110 mm x 80 mm

DIALOG® AERO

PART NUMBERS

- 910-630-001 • Dialog® Aero 1 ch Wireless Rx
- 910-630-002 • Dialog® Aero 2 ch Wireless Rx
- 910-630-100 • Dialog® Aero 2 Bay Charger Dock
- 910-630-201 • Dialog® Aero Beltpack Tx
- 910-630-202 • Dialog® Aero Handheld Tx
- 910-630-301 • Dialog® Aero Lav Mic Omni
- 910-630-302 • Dialog® Aero Headset Mic Omni
- 910-630-500 • Dialog® Aero Rack Mount Joining Kit
- 910-630-600 • Dialog® Aero Antenna Distributor
- 910-630-601 • Dialog® Aero Antenna 2- way Combiner Pair
- 910-630-602 • Dialog® Aero Antenna Ceiling Omni Pair



Scan this Code,
to learn more

ClearOne owns all rights to its logos and trademarks used in connection with this datasheet. All other logos and trademarks appearing on the datasheet are the property of their respective owners. Use of third-party logos or trademarks is for the sole informational purpose of identifying the referenced goods and/or services. Use of a third-party logo or trademark does not necessarily indicate an endorsement by the owner of that mark or a partnership, affiliation, or sponsorship between the owner and ClearOne.

In a time of rapid change, it is difficult to ensure that all information on this datasheet is accurate and up-to-date. The content on this datasheet is for informational purposes only and is subject to change without notice.

SALES AND INQUIRIES

Headquarters

5225 Wiley Post Way
Suite 500
Salt Lake City, UT 84116

US & Canada

Tel: +1.801.975.7200

International

Tel: +1.801.975.7200

Sales

Tel: +1.801.975.7200
sales@clearone.com

Tech Support

Tel: +1.801.974.3760
audiotechsupport@clearone.com