

Versa® 120D USB-C DOCKING STATION



A versatile collaboration solution combining a USB-C Docking Station and Dante™ audio networking into a single easy-to-use device.

- > Simplifies BYOD workflows with USB-C input supporting USB4, DP 1.4 Alt Mode, and 100 W power delivery – all through a single-cable laptop connection.
- > Integrates seamlessly with any AV setup with dual HDMI outputs supporting up to a single 8K30 display or dual 4K60 displays.
- > Supports 2x2 channels of Dante™ audio, allowing PCs and mobile devices to play and capture audio with Dante-enabled devices over a standard IP network.
- > Simplify deployment and configuration with the Versa 120D's automatic discovery and native integration with Audinate Dante Controller software.
- > Supports HDCP 2.3/2.2/1.4 for encrypted transmission of high-definition video and audio, ensuring compliance with content protection standards.
- > Experience blazing-fast USB-C speeds of up to 40 Gbps.
- > Meets TAA requirements – ideal for government and educational deployments.



Broad Interoperability

Versa 120D seamlessly integrates with ClearOne's BMA 360D ceiling tile beamformer, UNITE® series cameras, and CHAT series audio conferencing devices, delivering guaranteed performance and a streamlined user experience.



Simple BYOM Connectivity

Supports 10/100/1000 Base-T auto-negotiation with Ethernet pass-through over USB-C, delivering reliable, high-speed network connectivity directly to BYOM device.


APPLICATIONS

- BYOM Video Conferencing
- BYOM Audio Conferencing
- In-Room Presentation

WORKSPACES

- Small to mid-sized meeting rooms
- Boardrooms
- Executive Offices
- Classrooms

Versa[®] 120D USB-C DOCKING STATION

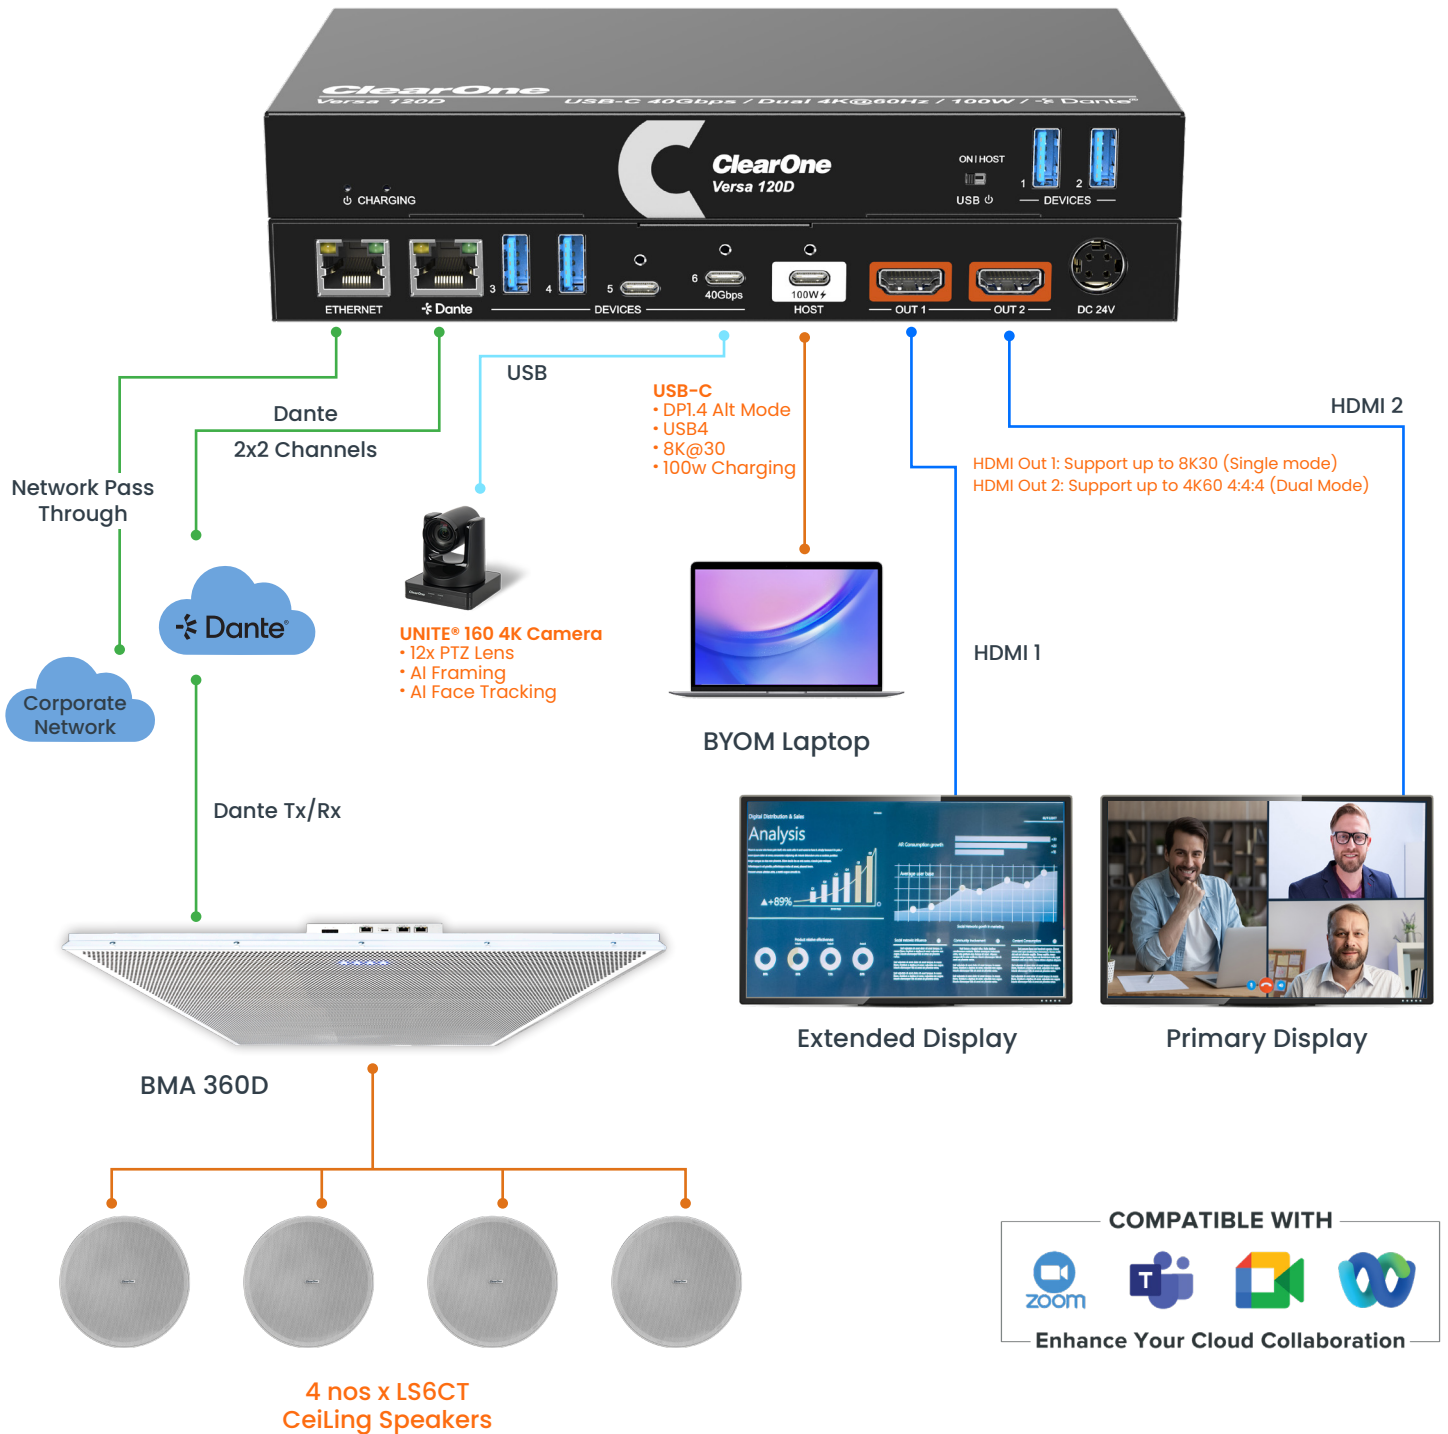

Versa[®] 120D USB-C DOCKING STATION

PART NUMBER	• 910-300-120D
VIDEO INPUTS	<ul style="list-style-type: none">• 1 x USB-C input Supports USB4, and DP1.4 Alt mode• USB-C max resolution 8K@ 30• Provide PD 100W power for connected equipment like laptop
VIDEO OUTPUTS	<ul style="list-style-type: none">• 2 x HDMI Type-A female connector• HDMI Out 1: Support up to 8K30 video out (Single mode)• HDMI Out 2 Support up to 4K60 444 video out (Dual mode)
DANTE AUDIO	<ul style="list-style-type: none">• Dante Audio: 2 x 2 channels• Sample Rate: 44.1, 48, 88.2, 96 kHz• Bit Depth: 16, 24, 32• Dante Device Latency: 1, 2, or 5 ms (configurable using Dante Controller)• Control by Dante SW like Dante controller, Dante Director
HDMI AUDIO	• PCM 2.0, 5.1, 7.1 audio, Dolby Atmos [®] , Dolby [®] TrueHD, Dolby Digital [®] Plus
USB PERIPHERALS	<ul style="list-style-type: none">• 4 x USB-A and 1x USB-C (Port 5), USB 5Gbps standard, Shared 5V3A power total• 1 x USB-C (Port 6), USB 4 standard, provide 13 W, power always on
CONTROL	<ul style="list-style-type: none">• Toggle switch for Devices 1 – 5 ports power management.<ul style="list-style-type: none">• ON: USB devices power always on• Host: USB devices power follow host• Supports EDID pass-through• Supports HDCP 2.3/2.2/1.4 versions
ETHERNET	• 1 x RJ-45 port for network passthrough to USB-C IN; 10/100/1000 Base-T auto negotiation
POWER	• 1 x 4-pin DIN connector power adapter 24 VDC 6.5 A
GENERAL	<ul style="list-style-type: none">• Operation Temperature: -10 °C ~ +55 °C• Storage Temperature: -25 - +70 °C• Relative Humidity: 10 % - 90 %• Power Consumption: 139.6 W (Max)• USB-C Power Charging: 100 W (Max)• Dimension (W x H x D): 8.26 x 0.98 x 4.72 " (210 x 25 x 120 mm)• Weight: 1.47 lbs (0.670 Kg)

Versa® 120D USB-C DOCKING STATION



Scan this Code,
to learn more

The ClearOne Versa 120D includes license from Audinate Pty Ltd under U.S. patent number(s) 7747725, 8005939, 7978696, 8171152 and other patents issued, see www.audinate.com/patents, or such other legend as Audinate may stipulate from time to time to the Manufactured Product and any packaging and marketing materials therefor.

ClearOne owns all rights to its logos and trademarks used in connection with this datasheet. All other logos and trademarks appearing on the datasheet are the property of their respective owners. Use of third-party logos or trademarks is for the sole informational purpose of identifying the referenced goods and/or services. Use of a third-party logo or trademark does not necessarily indicate an endorsement by the owner of that mark or a partnership, affiliation, or sponsorship between the owner and ClearOne.

In a time of rapid change, it is difficult to ensure that all information on this datasheet is accurate and up-to-date. The content on this datasheet is for informational purposes only and is subject to change without notice.

SALES AND INQUIRIES

Headquarters

5225 Wiley Post Way
Suite 500
Salt Lake City, UT 84116

US & Canada

Tel: +1.801.975.7200

International

Tel: +1.801.975.7200

Sales

Tel: +1.801.975.7200
sales@clearone.com

Tech Support

Tel: +1.801.974.3760
videotechsupport@clearone.com