


COLLABORATE® Versa® Lite CT

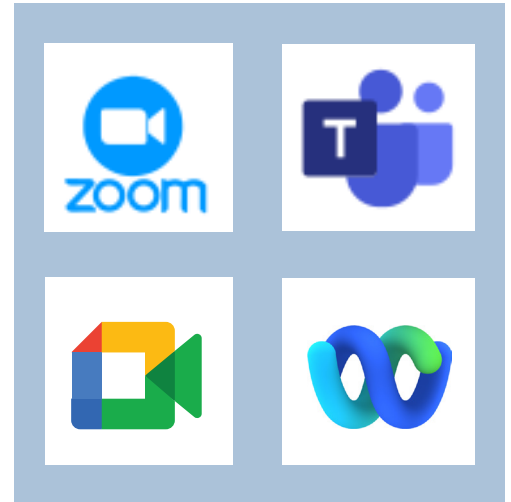

COLLABORATE® Versa Lite CT features a USB audio-enabled Beamforming Ceiling Tile Microphone Array that brings cost-effective and superb professional conferencing audio to small-and mid-sized meeting rooms.

Enhances Any Cloud-Based App
Great room solution – dramatically enhances the audio experience for any cloud-based collaboration application.

- > Great room solution – dramatically enhances the audio experience for any cloud-collaboration application with no external DSP needed.
- > BMA CT with built-in AEC and adaptive steering (think of it as smart switching) provides impeccable room coverage.
- > Includes 2x10 Watt power amps.
- > Easily and quickly configure the system using CONSOLE® AI Lite software with Audio Intelligence and Auto Connect™.
- > Connect laptop or room PC to the BMA CT directly through the USB port on the Versa USB. The included 50-foot CAT6 cable connects the Versa USB to the BMA CT.
- > Complete your system with any UNITE® conferencing camera.
- > Add a Versa Hub for single-cable connection for cloud-based collaboration.
- > ClearOne's BMA technology is protected by at least a dozen patents and pending patent applications.
- > Delivering superb coverage and quality at an unbeatable price, the Versa Lite CT is easy to install and easy to use.



APPLICATIONS

- Video conferencing
- Audio conferencing
- In-Room presentation

WORKSPACES


- Executive offices
- Small-to mid-sized meeting rooms
- Boardrooms

Complete and Convenient Collaboration


Complete your system with any UNITE camera, and add a Versa Hub for single-cable cloud-based collaboration.

Versa Lite CT brings cost-effective and superb professional conferencing audio to small- and mid-sized meeting rooms—just add a laptop or room PC and displays. Expand your system with optional ClearOne peripherals— UNITE conferencing cameras, and ClearOne ceiling loudspeakers.


Versa Lite CT using laptop with optional ClearOne peripherals— COLLABORATE Versa Hub, choice of UNITE conferencing cameras

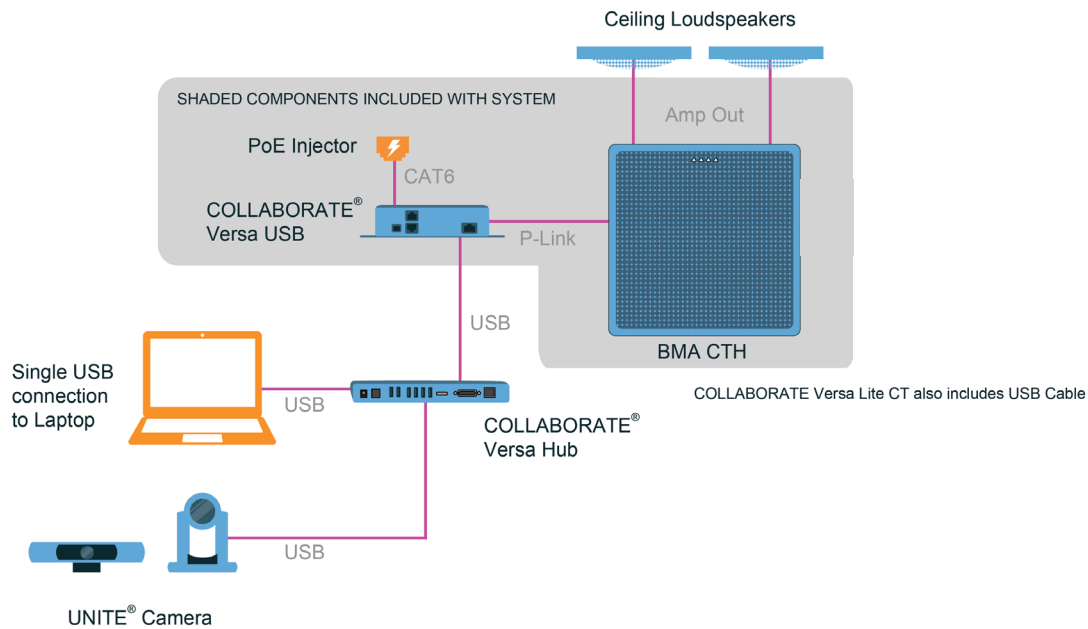

Versa Lite CT using room PC and 2 room displays, with optional ClearOne peripherals— COLLABORATE Versa Hub, choice of UNITE conferencing cameras

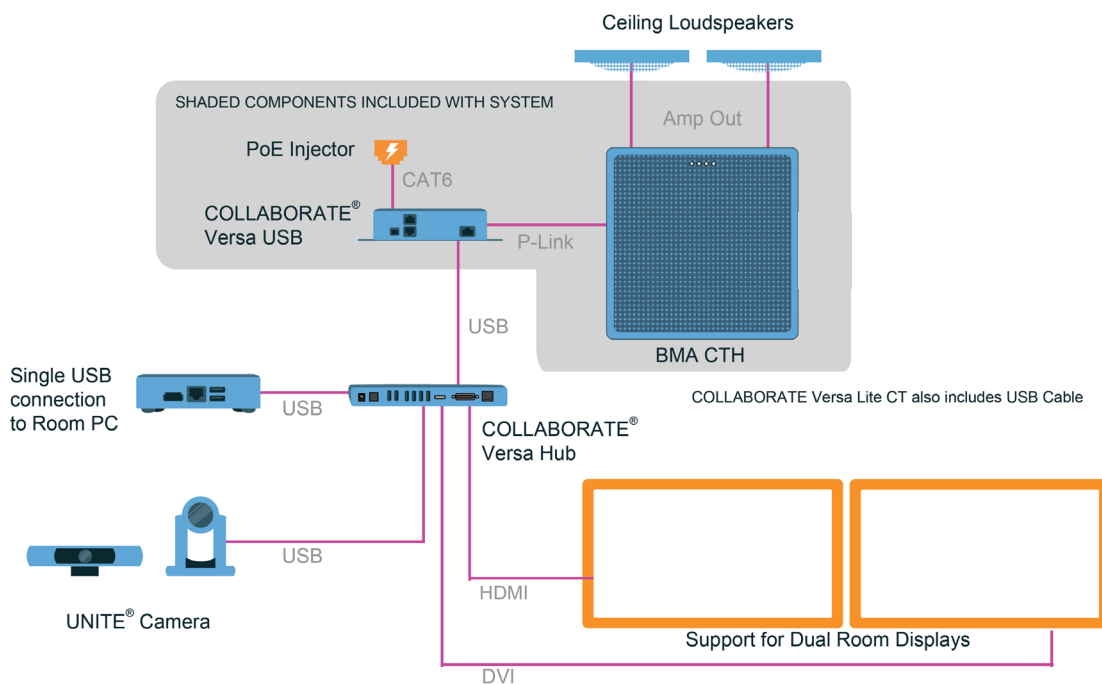

Versa Lite CT using laptop and 2 room displays, with optional ClearOne peripherals—
COLLABORATE Versa Hub, choice of UNITE conferencing cameras

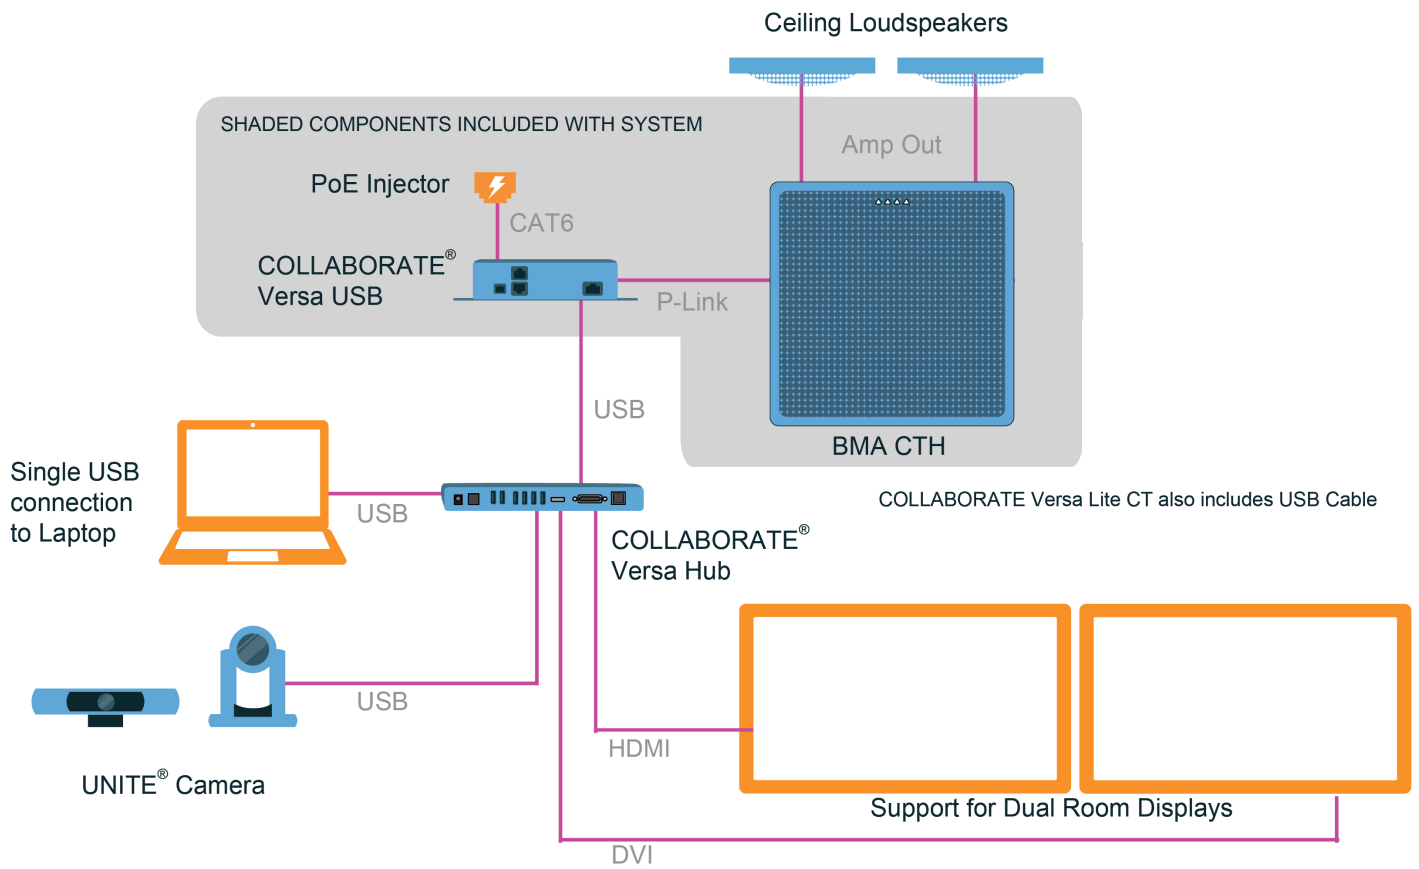

COLLABORATE[®] Versa[®] Lite CT

INCLUDES	<ul style="list-style-type: none">• BMA CT 24in or BMA CT 600mm• COLLABORATE Versa USB• PoE Injector Kit• RJ-45 CAT6 Cable – 50'
BMA CTH 24 MICROPHONES	<ul style="list-style-type: none">• Number of Beams: Two patterns, either 5 or 6 beams• Polar Pattern: Custom• Frequency Response: 150 Hz – 16 kHz, +/- 3dB• Dynamic Range: 150 Hz – 16 kHz, > 70dB
AMPLIFIER OUTPUT	<ul style="list-style-type: none">• Type: 5.08 mm Black Header, Male, Phoenix type Euroblock• Audio: 2 channels• Output Power: 2x10 W Max, 8Ω load*• Frequency Response: 20 Hz – 22 kHz @ +10 dBu, +/- 0.5 dB
CONFIGURATION	<ul style="list-style-type: none">• Acoustic Echo Cancellation (AEC) on/off• Noise Cancellation (NC) on/off• Automatic Level Control (ALC) on/off• Gain adjust• Mute on/off
POWER SELECTION SWITCH	<ul style="list-style-type: none">• Type: Slide Switch
CONFIGURATION & ADMINISTRATION SOFTWARE	<ul style="list-style-type: none">• CONSOLE[®] AI Lite Software
MOUNTING	<ul style="list-style-type: none">• CONSOLE[®] AI Lite Software Ceiling mount (24" or 600 mm drop-ceiling grid)
DIMENSIONS	<ul style="list-style-type: none">• CONSOLE[®] AI Lite Software 24" BMA CT• 23.72 x 23.72 x 2.13" (602.5 x 602.5 x 54.1 mm)• 600 mm BMA CT:• 23.33 x 23.33 x 2.13" (592.5 x 592.5 x 54.1 mm)
WEIGHT	<ul style="list-style-type: none">• BMA CT – 7.7 lbs (3.5 Kg)
COLLABORATE VERSA USB	<ul style="list-style-type: none">• Port Type: USB-B Connector• Audio: Digital audio, 2 x 2 bidirectional channels• Sample Rate: 48 kHz• Sample Bit Depth: 24 Bit• Compatible: USB 2.0, USB 3.0• USB Cable Distance: 16 feet (5 meters)• Compatible: Windows & Mac OS devices

COLLABORATE[®] Versa[®] Lite CT

- P-LINK PERIPHERAL BUS** • Ports Type: RJ-45 (Cat5e or Cat6)
• P-Link In & Out: Proprietary Peripheral Bus
• PoE In:
• P-Link In Port
• PoE 802.3af Mode B, Midspan
• Power on “spare pairs” 4,5 and 7,8
• Cable: Solid core 24AWG, factory terminated Cat 5e or Cat 6 cable
• Distance: Up to 200 feet (60 meters)
- POWER SELECTION SWITCH** • Sensor Type: Slide Switch
• Toggle toward P-Link to power device by P-Link
• Toggle toward PoE to power device by PoE Injector
- PoE In PORT** • Port Type: RJ-45 port
• PoE: 802.3af or 802.3at PoE/PoE+ injector input
- MOUNTING** • Rack-shelf mount
• Under the table mount
• Wall mount
• Ceiling mount
- DIMENSION & WEIGHT** • Width x Depth x Height:
• Without rack-ears: 5.5" x 1.6" x 4.1" (139.7 x 106.68 x 104.14 mm)
• With rack-ears: 6.8" x 1.7" x 4.1" (172.72 x 4.3.18 x 104.14 mm)
• Unit Weight: 0.88 lbs (0.4 kg)
- SYSTEM POWER & THERMAL** • Power Type: PoE/PoE+
• Port Type: RJ-45
• PoE In/P-Link In: 802.3af or 802.3at PoE/PoE+
• Power Source: PoE Injector or equivalent
• PoE: IEEE 802.3at compliant devices providing 56V and 640 mA (36 W).
• P-Link In - Mode B
• Power Consumption:
• 100-240 VAC, 50/60 Hz, 3 Watts Typical
• 38 W at max power 1kHz (2 x 10 W)
• Thermal: 130 BTU/Hr at max power
• Operating Temperature: 14° F/-10° C to 104° F/40° C ambient temperature

COLLABORATE® Versa® Lite CT

PART NUMBERS

INCLUDES

- 930-3200-010-U - COLLABORATE Versa Lite CT
- 910-3200-205-U BMA CT 24 in
- 910-3200-305 COLLABORATE Versa USB
- 910-3200-202 PoE power supply kit
- 910-3200-204-50 RJ45 CAT6 Cable - 50'

INCLUDES

- 930-3200-010-I - COLLABORATE Versa Lite CT INTL
- 910-3200-205-I BMA CT 600 mm
- 910-3200-305 COLLABORATE Versa USB
- 910-3200-202 PoE power supply kit
- 910-3200-204-50 RJ45 CAT6 Cable - 50'

BMA CT MOUNTS FOR NON-TILE CEILINGS

- 910-3200-210 BMA Surface-Mount Kits 24 in
- 910-3200-210-I BMA Surface-Mount Kits 600 mm
- 910-3200-212 BMA Recessed-Mount Kits 24 in
- 910-3200-212-I BMA Recessed-Mount Kits 600 mm

OPTIONAL CLEARONE PERIPHERALS

- UNITE® 150 PTZ Camera
- COLLABORATE® Versa Hub
- Ceiling Loudspeakers



Scan this Code,
to learn more

SALES AND INQUIRIES

Headquarters

5225 Wiley Post Way
Suite 500
Salt Lake City, UT 84116

US & Canada

Tel: +1.801.975.7200

International

Tel: +1.801.975.7200

Sales

Tel: +1.801.975.7200
sales@clearone.com

Tech Support

Tel: +1.801.974.3760
audiotechsupport@clearone.com