COLLABORATE® Versa™ Pro 60

Improve the BYOD experience in huddle spaces and small conference rooms by adding professional quality audio and video.

> One CONVERGE® Huddle audio DSP mixer for a professional audio experience.

> One Ceiling Microphone Array with 360-degree coverage reducing noise and reverberation.

> Clutter-free with optional CONVERGE Huddle VESA mount.

> One UNITE® 60 4K Camera with Smart Face Tracking or Voice Tracking. AI processing optionally tracks an individual or frames an entire group for perfect framing and focus.

> Configure Versa Pro CT directly through the USB port, or use network Ethernet jack.

> Monitor, control, and audit Versa Pro CT with CONVERGENCE™ unified AV network management software.

Professional, Crystal-clear audio
Includes ClearOne's CONVERGE® Huddle audio DSP mixer and Ceiling Mic Array for crystal-clear voice clarity and an unrivaled audio experience.

Smart Face or Voice Tracking
AI processing optionally tracks an individual or frames an entire group for perfect framing and focus.

APPLICATIONS

• BYOD Video Conferencing
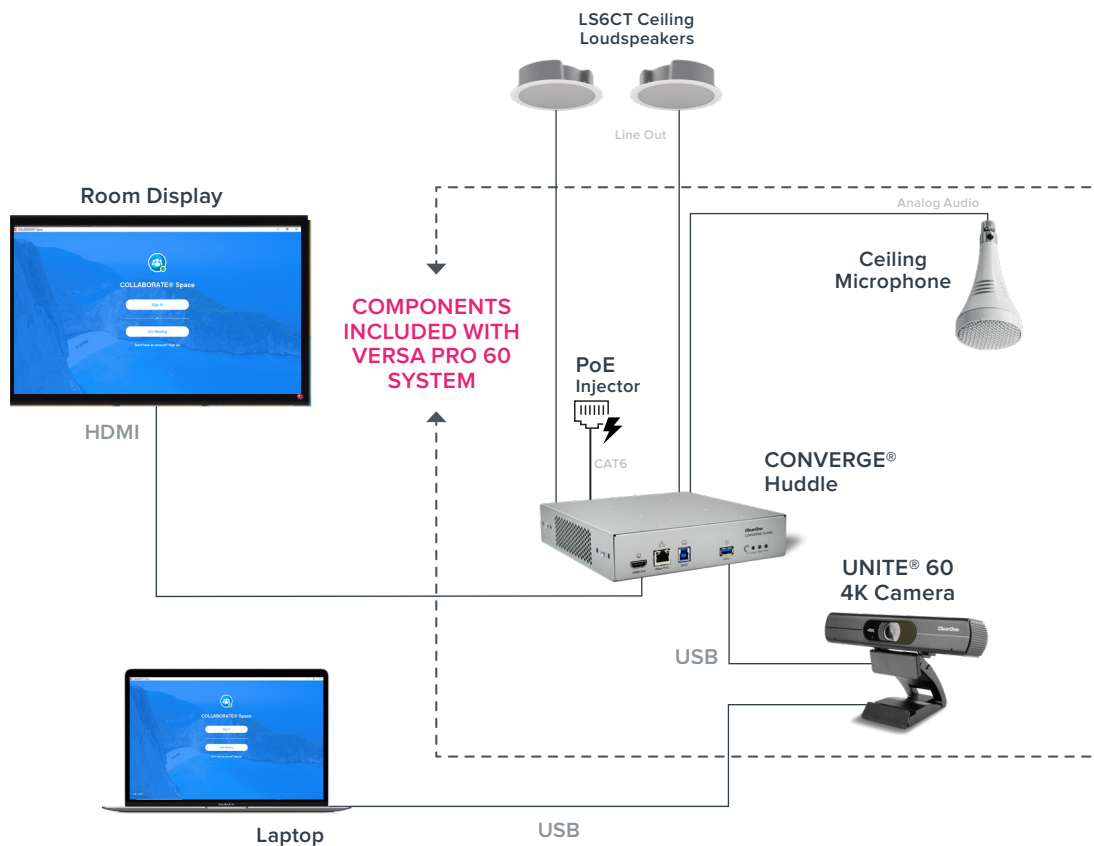• BYOD Audio Conferencing
• In-Room Presentation

WORKSPACES

• Mid-sized Meeting Rooms
• Executive Offices

Great Ideas Need to Be Seen - and Heard!™

COLLABORATE® Versa™ Pro 60

COLLABORATE Versa Pro 60 using Room PC and display, with optional ClearOne Ceiling Loudspeakers

LS6CT Ceiling
Loudspeakers

Line Out

Room Display

Analog Audio

Ceiling
Microphone

COMPONENTS
INCLUDED WITH
VERSA PRO 60
SYSTEM

PoE
Injector

HDMI

CAT6

CONVERGE®
Huddle

UNITE® 60
4K Camera

USB

USB

Laptop

COLLABORATE® Versa™ Pro 60

INCLUDES	• CONVERGE® Huddle • UNITE® 60 4K Camera • Ceiling Microphone Array (White) • PoE Injector Kit

CONVERGE HUDDLE

INPUTS	• 3 channel balanced audio mic/line inputs with AEC • 1 channel balanced audio line input without AEC • 3.81 mm orange-color Phoenix/Euroblock type male header, push-on mini-terminal block
LINE OUTPUTS	• 2 channel balanced audio line outputs, 3.81 mm black-color Phoenix/Euroblock type male header, push-on mini-terminal block • 1 USB 3.0 Type-B • 1 USB 3.0 Type-A • RJ-45, 10/100/1000 Mbps, passthrough to USB-B 3.0
HDMI RESOLUTIONS	• 1600 x 1200p @ 60 Hz, 4:3 ratio • 1920 x 1200p @ 60 Hz, 16:10 ratio • 2560 x 1440p @ 60 Hz, 16:9 ratio
UNITE® 60 4K CAMERA	• 4K 30fps, 8.29 M Pixel resolution • Smart Face Tracking, Voice Tracking • 120 ° Wide-angle Field View • Control of camera functions via IR remote control or UVC protocol • 3x Digital Zoom, f/1.8 to 2.8 Aperture
CONTROL	• Remote control, USB (UVC), RS-232

CEILING MICROPHONE ARRAY

ACOUSTIC CHARACTERISTICS	• Polar Pattern: Cardioid • Dynamic Range: 80 dB, 1 kHz @ max SPL • Signal/Noise Ratio: 60 dBA, 1 kHz @ 1 Pa • Frequency Response: 100 Hz - 12 kHz • Sensitivity: 114 mV/Pa
ELECTRICAL CHARACTERISTICS	• Element: Fixed-charge back plate permanently polarized condenser • Phantom Power Requirement: 12-52 VDC, 2 mA typical • Impedance: 200 Ω
PART NUMBERS INCLUDES	• 930-3200-P60 COLLABORATE® VERSA Pro 60 • 910-3200-701 CONVERGE® Huddle • 910-210-009 UNITE® 60 4K Camera • 910-001-013-W Ceiling Microphone Array (White) • 910-3200-202 PoE Injector Kit

SALES AND INQUIRIES